

MailChimp Integration

Connect your SurveyGizmo and MailChimp accounts to automate contact creation and management. You'll also have the ability to use your MailChimp subscriber details to populate data into your SurveyGizmo surveys (a great way to keep your contact records up to date).

The SurveyGizmo MailChimp Action allows you to:

1. Create or update contacts in MailChimp from SurveyGizmo survey submissions using the [MailChimp Push Action](#). There are three push methods:

- **Upsert** - An upsert is a conditional action: *update* if a record exists, *insert* if it doesn't. The contact email address will be used to look for a matching record in MailChimp. If an email address already exists in a list, the existing contact record will be updated. If there is no match for an email address in MailChimp, a new contact record will be created.
- **Insert** - Insert is the term used for creating a new contact.
- **Update** - An update is an update of an existing contact.

2. Pull contact information (MailChimp subscriber details) into questions/fields within your SurveyGizmo survey using a [MailChimp Pull Action](#).

Integration Setup

Before you get started, note that you will need your MailChimp **API Key** to set up the integration within SurveyGizmo. Visit the [MailChimp API Key documentation](#) for instructions on obtaining your key.

- 1.** To get started connecting your MailChimp account in SurveyGizmo, go to **Account > Integrations > 3rd Party Integrations** and locate the MailChimp integration. Click the **Configure** button to get started.
- 2.** On the **Authentication** tab, provide an **Account Label** (this is just a name for the account that is internal to you and your fellow SurveyGizmo users) and the MailChimp **API Key** (both fields are required). If you don't have your API Key readily available, visit the [MailChimp API Key documentation](#) for instructions.

3. Once you are finished setting up your integration click **Save**. You will see a status of **Enabled**. Once your integration is enabled you can add the **MailChimp Action** to your surveys to push/pull contact data.

Integration	Name	Status	Verified
	MailChimp Integration	Enabled	N/A

MailChimp Push Action: Push Info From a SurveyGizmo Survey to MailChimp List Fields

The push method for SurveyGizmo's MailChimp Action allows you to automate the contact creation and management process. Use your SurveyGizmo survey to collect contact details and then sync them to your MailChimp contact list. You can use the push method to update, insert, or upsert.

The push action requires collecting and sending an email address to MailChimp to either create new contacts or update existing ones. If your push action will result in the creation of a new contact (both inserts and upserts will create new contacts), you'll also need to push a Status for this new subscriber. Status has possible values of subscribed, unsubscribed, pending, and cleaned.

MailChimp Action Push Setup

Your push action must be on a page that follows any survey questions that will be sent to MailChimp. We recommend placing the push action on your survey's [Thank You page](#).

1. Create a survey and add any questions/fields that are necessary for you to push to a contact within MailChimp. At a minimum, add an [Email Question](#) to your survey (an email address is required to both create and update a contact in MailChimp).
2. Click the **Action** link on the page where you wish to place your action and locate the **MailChimp** action within the **Integrations** section. Click the **+Add** button.
3. Provide an **Integration Title** for your action (This is a title that is internal to you and your fellow SurveyGizmo users; it should represent the purpose of the action.)

4. Under **Select a MailChimp Integration** your integrations will be identified by the account label that you provided when connecting your MailChimp and SurveyGizmo accounts on the **Integrations** page. Select one.
5. Using the **Select an Object** dropdown menu, choose the MailChimp list you wish to push to. Currently, the lists object is the only available object type.
6. Select **Push Data to MailChimp** under the **Method** section. Select the push method that you wish to use:
 - o **Upsert** - If the provided email address exists in MailChimp, the survey response will be used to update an existing contact record with that email. If an email address doesn't exist, a new contact record will be created with the provided email address. *An email address is required to upsert in MailChimp. Status is also a required field in MailChimp.*
 - o **Insert** - Insert is the term used for creating a new contact record. *An email address and status are required to insert a new contact in MailChimp.*
 - o **Update** - An update is an update of an existing contact record. *An email address (unique identifier) is required to reference the contact record that should be updated.*
7. The next step requires identifying the question/field in the survey that contains the respondent's email address as this is required for all push methods. The email address must be passed into or collected on the survey and stored in either a question or [Hidden Value Action](#). Use the dropdown under **Question containing the MailChimp Contact Email** to select the survey question/field that contains the respondent's email.
 - a. In the event that you need to pass in the email address as a URL variable or reference it via a merge code, select the **Static Value (Merge Codes, etc.)** option. You will see an additional field and can input a static value or use the merge code helper to reference the email address:

Question containing the MailChimp Contact Email

Static Value (Merge Codes, etc.) ▾

[url("email")]

[Select a Merge Code](#)

- b. Also, if you are inserting a new contact, make sure to map this email question/field to the email field in MailChimp (see step 8 below).
-

8. Next, map your SurveyGizmo fields to your MailChimp Fields under the **Map Fields** section.
 - a. If you selected either the Insert or Upsert method the MailChimp Required fields (Email Address and Status) are added by default.
 - i. For Email Address simply select the SurveyGizmo field where the email address is collected/stored to finish the mapping.
 - ii. The Status is ready to go but you can change the default value to something other than subscribed (i.e. unsubscribed, pending, or cleaned.)
 - b. Map the rest of the fields that you wish to send as part of your push.
 - i. In the left column, select the SurveyGizmo question/field from which you want to send data.
 - ii. In the right column, select the corresponding MailChimp List Field, that you want to send the question data to.
 - iii. Use the **Default Value** field to pass information to MailChimp in the event that the SurveyGizmo field is blank. [Merge codes](#) are also supported in this field when paired with the Static Value option in the first dropdown menu.
 - iv. Use the **Add another mapping** link to add more field pairs as needed.
 - c. See the [Mapping Fields Section](#) of this tutorial for additional details about sending data to MailChimp.

	MailChimp	Default Value
Q 1. Email	Email Address	
Static Value (use Default Value)	Status	subscribed
Q 2. What is your first name?	First Name	

9. Once you have finished mapping your fields, go to to the **Logic** tab if you only wish to trigger your MailChimp push under certain conditions. Make sure to **Save Action** when finished.

MailChimp Pull Action: Pull Info From MailChimp List Fields into a SurveyGizmo Survey

The pull method for SurveyGizmo's MailChimp Action allows you to use your MailChimp contacts' subscriber details within your SurveyGizmo surveys.

MailChimp Action Pull Setup: Pull Info MailChimp List Fields into a SurveyGizmo Survey

When pulling contact data from MailChimp into SurveyGizmo, the survey will need to be able to identify the contact whose information should be pulled in. This is done by providing the contact's email address.

Pull Action Placement Requirements:

- The pull action *must be on a page that follows the field in the survey that contains the email address.*
 - The pull action *must also precede any fields that it will be populating* . Pull actions can be on the same page as the fields they populate however they must come before those fields on the page.
- 1.** On a page that meets the above placement requirements, click the **Action** link and locate the **MailChimp** action within the **Integrations** section. Click the **+Add** button.
 - 2.** Provide an **Integration Title** for your action (This is a title that is internal to you and your fellow SurveyGizmo users; it should represent the purpose of the action.)
 - 3.** Under **Select a MailChimp Integration** your integrations will be identified by the account label that you provided on the **Integrations** page when connecting your accounts. Select one.
 - 4.** Using the **Select an Object** dropdown menu, choose the MailChimp list you wish to pull from. Currently, the lists object is the only available object type.
 - 5.** Select **Pull Data from MailChimp** under the **Method** section.
 - 6.** An *email address is required* to reference an existing contact record in MailChimp.
 - a.** This email address must be passed into or collected on the survey and stored in either a question or [Hidden Value Action](#).
 - b.** Use the dropdown under **Question containing the MailChimp Contact Email** to select the survey question/field that captures the respondent's email. *This field must be on a page that precedes the pull action you are setting up.*
-

Edit Action

Primary Setup Logic ♥ Need Help?

Integration Title

Pull Contact Details

Select a MailChimp Integration

MailChimp Integration Customer List

Method

Pull Data from MailChimp
 Push Data to MailChimp

Question containing the MailChimp Contact Email

email

- c. In the event that you need to pass in the email address as a URL variable or reference it via a merge code, select the **Static Value (Merge Codes, etc.)** option. You will see an additional field and can input a static value or use the merge code helper to reference the email address:

Question containing the MailChimp Contact Email

Static Value (Merge Codes, etc.)

[url("email")]

[Select a Merge Code](#)

- 7. Next, map your MailChimp fields to your SurveyGizmo fields under the **Map Fields** section.
 - a. In the left column, select the SurveyGizmo question/field that you want to populate.
 - b. In the right column, select the corresponding MailChimp List Field from which you want to pull data.
 - c. Use the **Default Value** field to pass a default value into SurveyGizmo in the event that the field is blank for that record in MailChimp. [Merge codes](#) are also supported in this field when paired with the Static Value option in the first dropdown menu.
 - d. Use the **Add another mapping** link to add more field pairs as needed.

Map Fields

SurveyGizmo	MailChimp	Default Value
Q 2. First Name	← First Name	
Q 3. Last Name	← Last Name	

[+ Add another mapping](#)

- 8. Once you have finished mapping your fields, you can optionally apply conditions for triggering your MailChimp push on the **Logic** tab. Make sure to **Save Action** when finished.

Map Fields


When mapping SurveyGizmo Questions to MailChimp list fields there are a couple of requirements to ensure your integration works properly.

Push Action: Required MailChimp List Fields

There are two default required fields in MailChimp. In addition, list fields may be set up as required in MailChimp by the list creator.

The default required fields in MailChimp are Email Address and Status. Status has possible values of subscribed, unsubscribed, pending, and cleaned. Whenever your MailChimp action may result in the creation of a new record (insert and upsert) we will add these fields by default.

- For Email Address, simply select the SurveyGizmo field where the email address is collected/stored to finish the mapping.
- The Status is ready to go but you can change the default value to something other than subscribed (i.e. unsubscribed, pending, or cleaned).

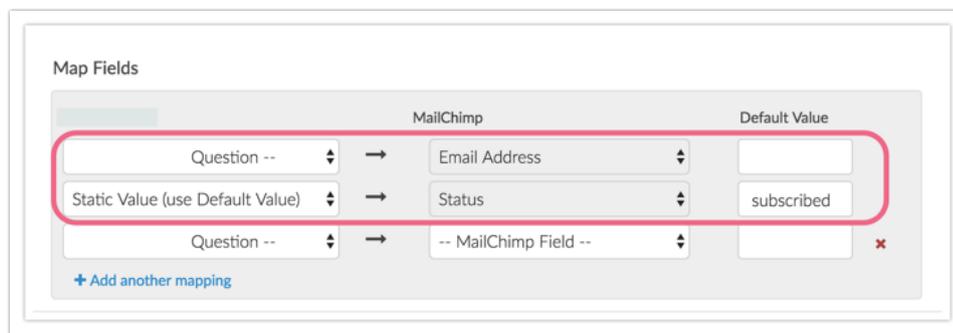

The screenshot shows a 'Map Fields' interface with three columns: 'Question --', 'MailChimp', and 'Default Value'. The first row maps 'Question --' to 'Email Address' with an empty default value. The second row maps 'Static Value (use Default Value)' to 'Status' with a default value of 'subscribed'. The third row maps 'Question --' to '-- MailChimp Field --' with an empty default value and a red 'x' icon. A blue link '+ Add another mapping' is at the bottom left.

Push and Pull: Matching MailChimp List Field Type

For both the push and the pull it is important to ensure that your SurveyGizmo [Reporting Values](#) and [question validation settings](#) are compatible with the [List Field Type](#) in MailChimp.

For example, MailChimp's default Birthday list field includes a month and day only (in either MM/DD or DD/MM) format. As such, you cannot map the Birthday field to SurveyGizmo's [Date question](#). Instead, you should pull this information into a [Textbox](#) question. If you require validation on this field you'll need to use [RegEx to validate](#) for month and day (or day and month).

Push To and Pull From MailChimp Groups (aka Interests)

If you are using [MailChimp Groups \(aka Interests\)](#) you can push and pull from these as well! You can push data from or pull data into either a *Hidden* or *Checkbox* Group. You can push data from (or pull data into) either a SurveyGizmo [Radio Button](#) or [Checkbox](#) question to interests.


The following mappings are supported:

- Push from SurveyGizmo Checkbox Question to MailChimp Checkbox Group or Hidden Group
- Push from multiple SurveyGizmo Radio Button Questions (One per group name) to MailChimp Checkbox Group or Hidden Group
- Pull from MailChimp Checkbox Group or Hidden Group into a SurveyGizmo Checkbox Question

- Pull from a MailChimp Checkbox Group or Hidden Group into a multiple SurveyGizmo Radio Button Questions (One per group name)

Push from SurveyGizmo Checkbox Question to MailChimp Checkbox Group or Hidden Group

Let's take the following example groups in MailChimp: Donating, Volunteering, Events. Note, this is a Checkbox Group in MailChimp, meaning one email can have multiple groups. This would work for Hidden Groups in MailChimp as well, as it allows for multiple selections.

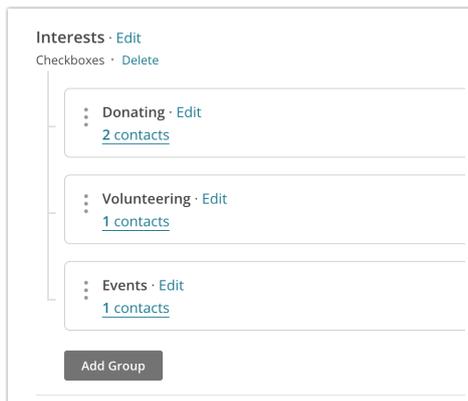

We can push data from a similarly formatted SurveyGizmo Checkbox Question.


2. What are you interested in?

Donating

Volunteering


Events

The mapping for a SurveyGizmo Checkbox Question to MailChimp Checkbox/Hidden Group would look like so:

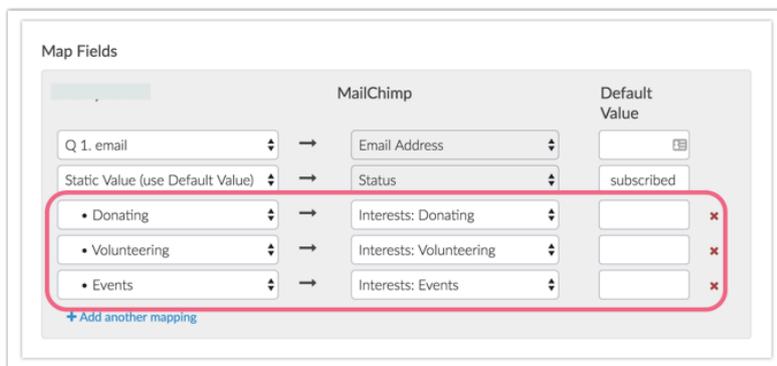


Push from multiple SurveyGizmo Radio Button Questions (One per group name) to MailChimp Checkbox Group or Hidden Group

Let's take the following example groups in MailChimp: Donating, Volunteering, Events. Note, this is a Checkbox Group in MailChimp, meaning one email can have multiple groups. This would work for Hidden Groups in MailChimp as well, as it allows for multiple selections.

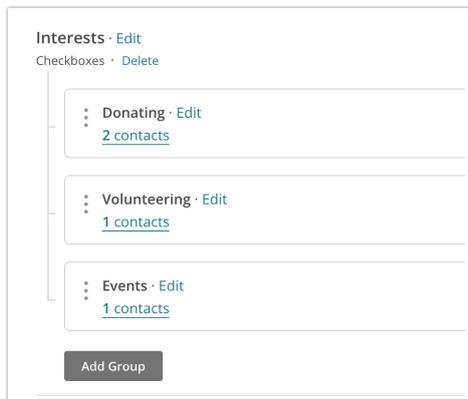

We can push three SurveyGizmo Radio Button Questions, one per group, like the below example. *You cannot push multiple Radio Button questions to one group in MailChimp.*

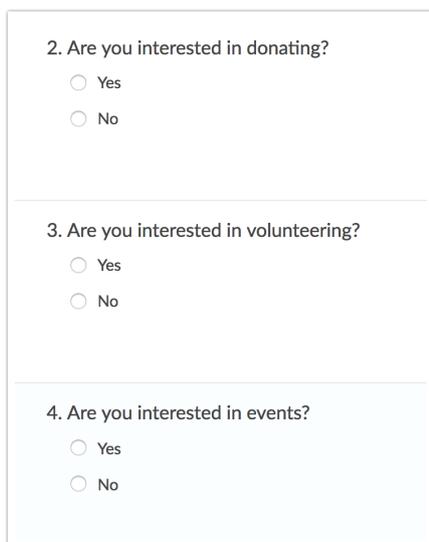A screenshot of three SurveyGizmo radio button questions. The first question is '2. Are you interested in donating?' with radio buttons for 'Yes' and 'No'. The second question is '3. Are you interested in volunteering?' with radio buttons for 'Yes' and 'No'. The third question is '4. Are you interested in events?' with radio buttons for 'Yes' and 'No'. Each question is separated by a horizontal line.

The mapping for separate SurveyGizmo Radio Button Questions to MailChimp Checkbox/Hidden Group would look like so:

Map Fields

	MailChimp	Default Value
Q 1. email	Email Address	
Static Value (use Default Value)	Status	subscriber
Q 3. Are you interested in donating	Interests: Donating	
Q 4. Are you interested in volunteering	Interests: Volunteering	
Q 5. Are you interested in events	Interests: Events	

[+ Add another mapping](#)

Requirements for Pushing to Radio Button questions

- You must have a *separate* Radio Button question per each group in MailChimp
- The [reporting values](#) for each separate Radio Button question must be in one of the following formats:
 - 0,1
 - True, False (case insensitive)
 - Yes, No (case insensitive)

What question do you want to ask?

Are you interested in donating?

Require this question
 Apply data retention policy to this question's responses. [Learn more.](#)

Multiple Choice Options

OPTION

Yes

No

[+ Click to Add Option](#) [Add "Other"/"N/A", etc](#) [Paste in Options](#)

Common Answer Library [Advanced Option Settings](#)

REPORTING VALUE


1

0

Pull from MailChimp Checkbox Group or Hidden Group into a SurveyGizmo Checkbox Question

You can pull data from checkbox or hidden interests to populate a [Radio Button](#) or [Checkbox](#) question.

Let's take the following example groups in MailChimp: Donating, Volunteering, Events.

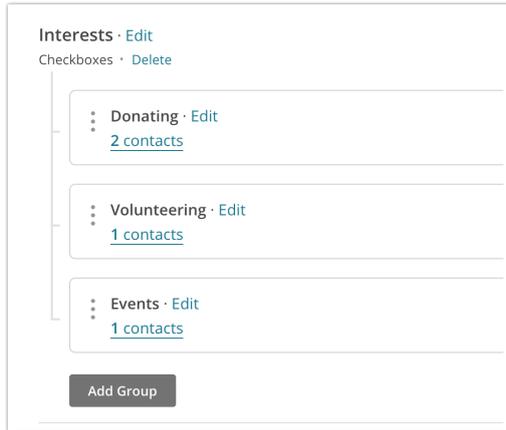

These can populate a similarly formatted Checkbox question.


2. What are you interested in?

Donating

Volunteering

Events


The mapping for a MailChimp checkbox/hidden group to a SurveyGizmo checkbox question would look like so:

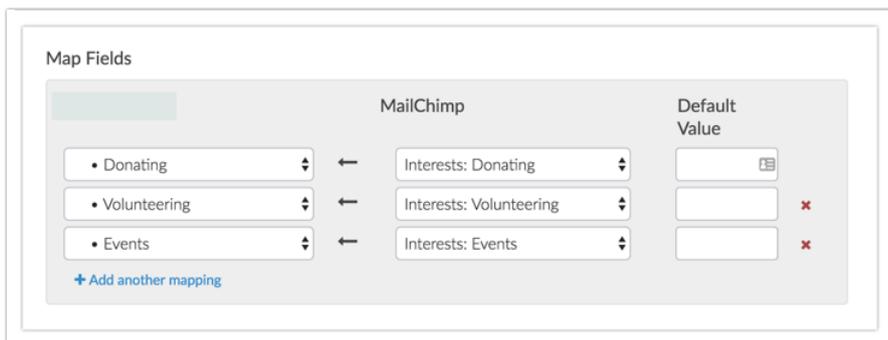

Pull from a MailChimp Checkbox Group or Hidden Group into a *multiple* SurveyGizmo Radio Button Questions (One per group name)

You can pull data from checkbox or hidden interests to populate a [Radio Button](#) or [Checkbox](#) question.

Let's take the following example groups in MailChimp: Donating, Volunteering, Events.

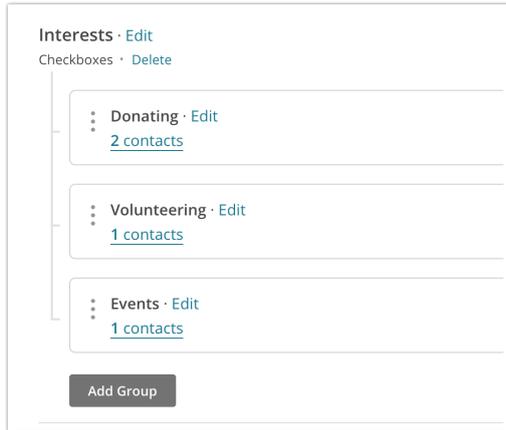

In order to populate three groups into Radio Buttons questions, we must populate into *three separate* Radio Button Questions, one per group, via a pull (see below example).

2. Are you interested in donating?

Yes

No

3. Are you interested in volunteering?

Yes


No

4. Are you interested in events?

Yes

No

The mapping for a MailChimp Checkbox/Hidden Group to separate SurveyGizmo Radio Button Questions would look like so:

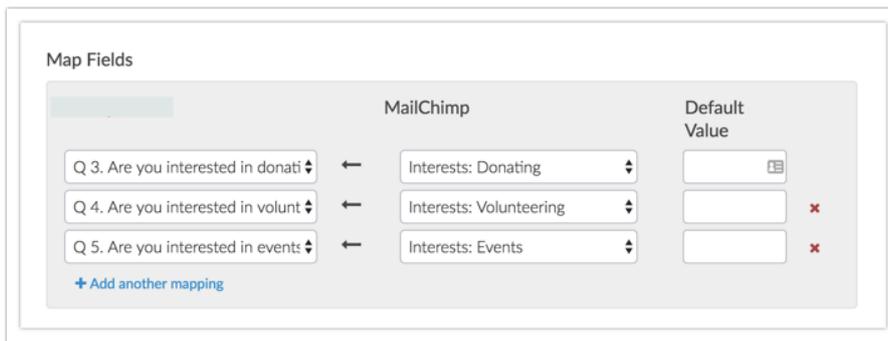

Requirements for Pushing to Radio Button questions

- You must have a separate Radio Button question for each group in MailChimp
- Your [reporting values](#) for each separate Radio Button question must be in one of the following formats:
 - 0,1
 - True, False (case insensitive)
 - Yes, No (case insensitive)

What question do you want to ask?

Are you interested in donating?

Require this question
 Apply data retention policy to this question's responses. [Learn more.](#)

Multiple Choice Options

OPTION

Yes

No

+ Click to Add Option [Add "Other"/"N/A", etc](#) [Paste in Options](#)

Common Answer Library [Advanced Option Settings](#)

REPORTING VALUE

1

0

FAQ & Troubleshooting

What version of the MailChimp API is used in this integration?

We use version 3.0 of the MailChimp API.

I'm using the Insert or Upsert Push Method and a contact was not created.

At the very least, Email Address and Status (with a value of either subscribed, unsubscribed, pending, cleaned) are required to create a new contact record in MailChimp.

Make sure that an email address was provided in your survey and that the email address was mapped to the Email Address List Field in MailChimp. Make sure that you have also passed over a Status. [Learn more](#) in the [Mapping Fields Section](#) of this tutorial.

Does your pull include a birthday?

MailChimp's default Birthday list field includes a month and day only (in either MM/DD or DD/MM) format. As such, you cannot pull this fields into SurveyGizmo's [Date question](#). Instead, you should pull this information into a [Textbox](#) question. If you require validation on this field you'll need to use [RegEx to validate](#) for month and day (or day and month).

One or more of my fields was not passed to MailChimp.

SurveyGizmo validates the data that you are trying to push to MailChimp to make sure that it is pushed in the format expected by MailChimp.


If you try to push a value that is not expected by MailChimp, that value will not be pushed successfully. This will not affect the entire push action, only the specific value.

For example, let's say that you are passing a URL/website to MailChimp from SurveyGizmo. In this case, MailChimp expects the data in the format of text.text (note the 'dot'). As such, trying to pass "surveygizmo" would fail, whereas "surveygizmo.com" would succeed.

My MailChimp Action did not pull/push data.

If your MailChimp Action is failing to push or pull data, check the **Action Log** for an associated survey response.

1. Go to **Results > Individual Responses**, and click on one of the responses associated with a failed action.

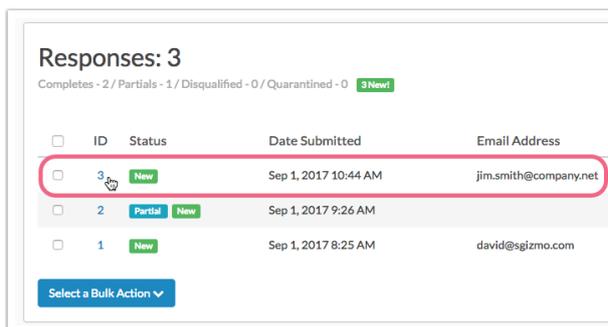

Responses: 3
Completes - 2 / Partial - 1 / Disqualified - 0 / Quarantined - 0 3 New

<input type="checkbox"/>	ID	Status	Date Submitted	Email Address
<input type="checkbox"/>	3	New	Sep 1, 2017 10:44 AM	jim.smith@company.net
<input type="checkbox"/>	2	Partial New	Sep 1, 2017 9:26 AM	
<input type="checkbox"/>	1	New	Sep 1, 2017 8:25 AM	david@sgizmo.com

Select a Bulk Action ▾

2. On the **Action Log** tab and locate your MailChimp Action (identified by Integration title you provided within the action). Here, you can view the action input/output and refer to any errors that might be presented. If you are using a push and no data is being passed into MailChimp, this is likely due to an unexpected value being pushed into a specific field (e.g. text being pushed to a number field).

Related Articles